



**JOHN DEERE**

**INSTALLATION INSTRUCTIONS**  
**Sprayer Wiring Kit for Full-Size Gators**  
**LP68195**

01/18/2022  
English  
Supplier ST50724

# Introduction

## Using Your Operator's Manual

Read this entire Installation Instructions, especially the safety information, before operating.

If your attachment manual has a section called Preparing the Machine, it means that you will have to do something to your tractor or vehicle before you can install the attachment. The Assembly and Installation sections of this manual provide information to assemble and install the attachment to your tractor or vehicle. Use the Service section to make any needed adjustments and routine service to your attachment.

If you have any questions or concerns with the assembly, installation, or operation of this attachment, see your local John Deere dealer or call the John Deere Customer Contact Center at 1-800-448-9282 for assistance.

## Table of Contents

Introduction	2
Product Compatibility	2
Parts in Kit	3
Installation	4-5
Warranty	6

## Product Compatibility

This wiring kit is compatible with John Deere Gator™ Utility Vehicles XUV835E, XUV835M, XUV835R, XUV865E, XUV865M, and XUV865R.

E spec models will require installation of BM26266 and BM26268.

M spec models will require installation of BM26268.

R spec models will require installation of BM26268.

For use with John Deere Sprayers: LP20852, LP20853, LP22908, LP22909, LP33597 and LP48006.


Contact your John Deere dealer for additional details.

Original instructions. All information, illustrations and specifications in this manual are based on the latest information available at the time of publication.

The right is reserved to make changes at any time without notice.

**NOTE: Retain these installation instructions with the machine operators manual.**

# Parts in Kit

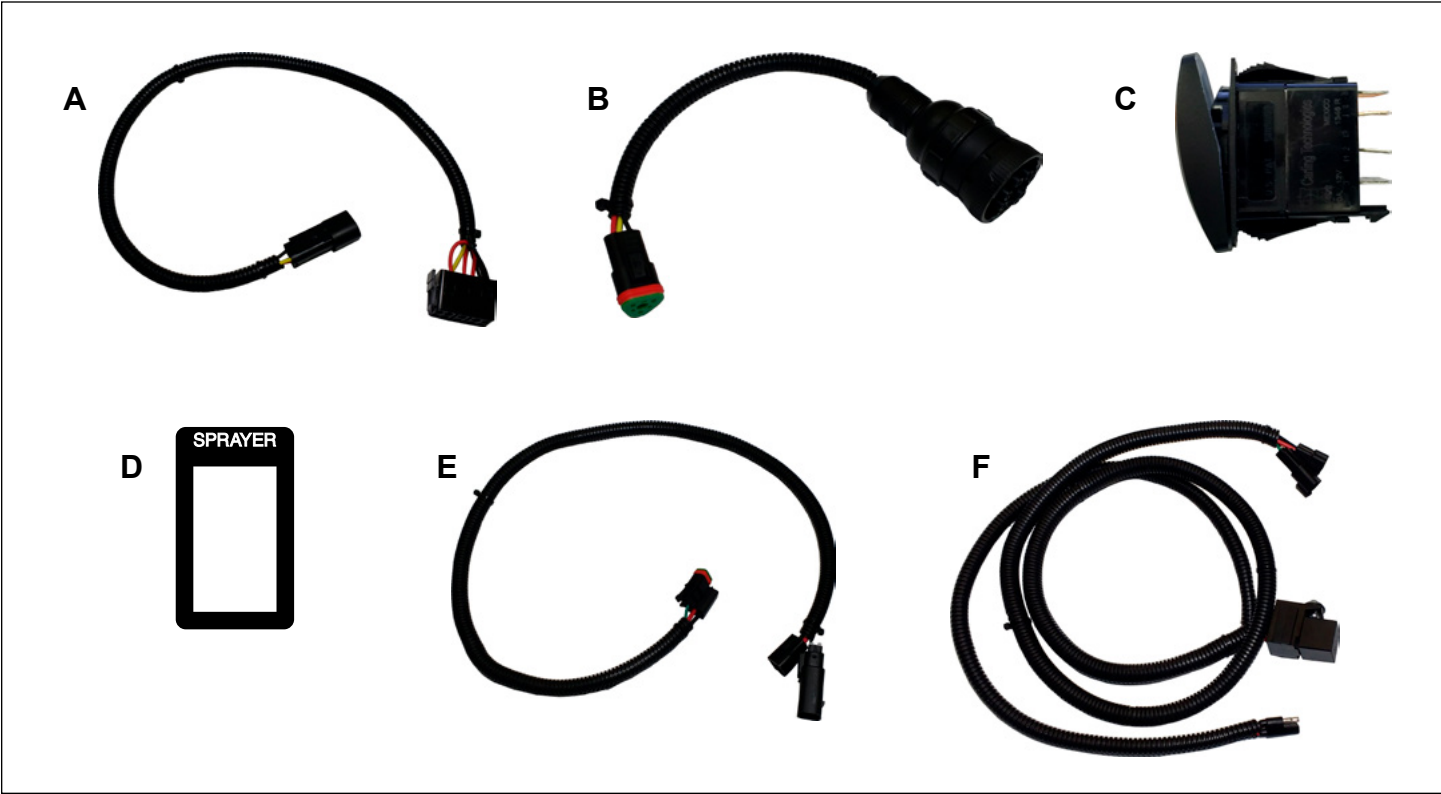

## Main Components

Description	Qty
Dash Harness Upper (A)	1
Dash Harness Lower (B)	1
Dash Switch (C)	1
Dash Sticker (D)	1
Chassis Harness (E)	1
Sprayer Harness (F)	1


## Hardware

Description	Qty
10-24 x 3/4" Truss Head Screw	1
10-24 Lock Nut	1
#10 Fender Washer	1
Zip Ties	5
Wire Harness Clips	3


# Installation

## Front Wire Harness Installation


1. On the dash, remove a switch blank from the center console to mount the switch.
2. Place the dash sticker (A) around the switch opening.

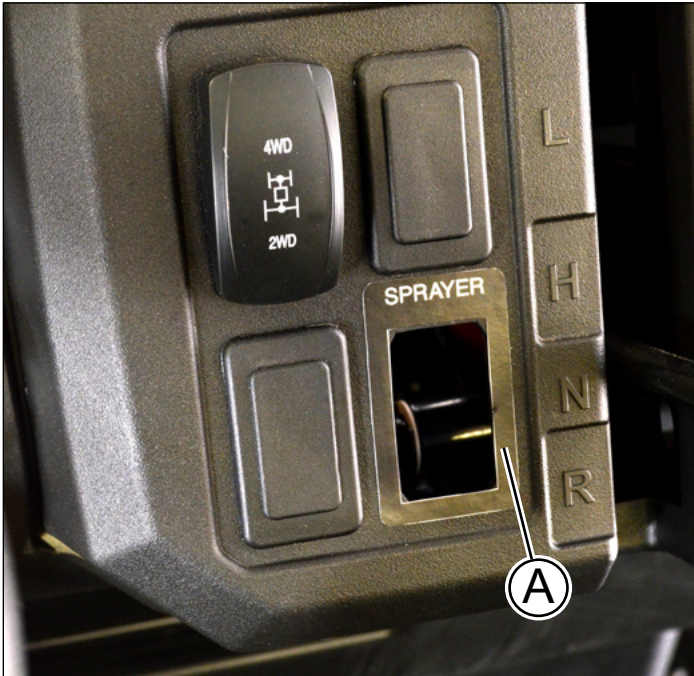

3. Connect the upper dash harness connector to the switch.
4. Insert the female triangular connector into the switch opening and route it down toward the opening under the dash. Push the switch (B) into the dash with the circle symbol on the bottom and the line symbol on top.

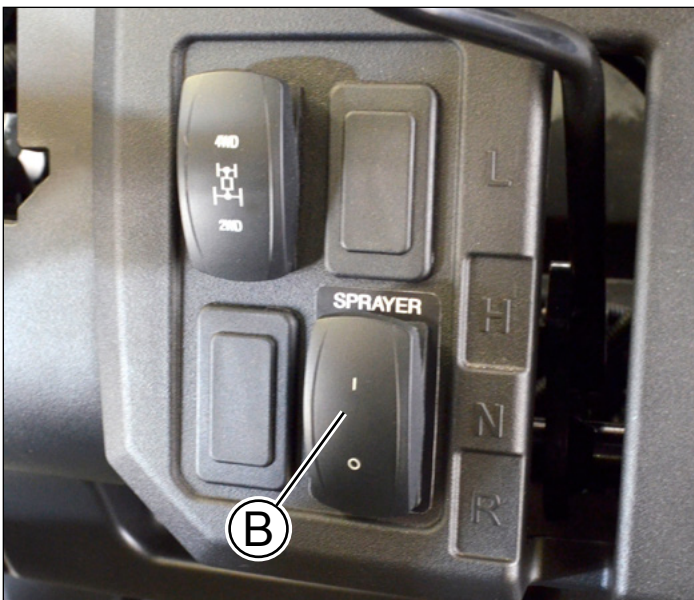


5. Connect the triangular connectors (C) of the upper and lower dash harness. Connect the round plug (D) to the rear attachment port.

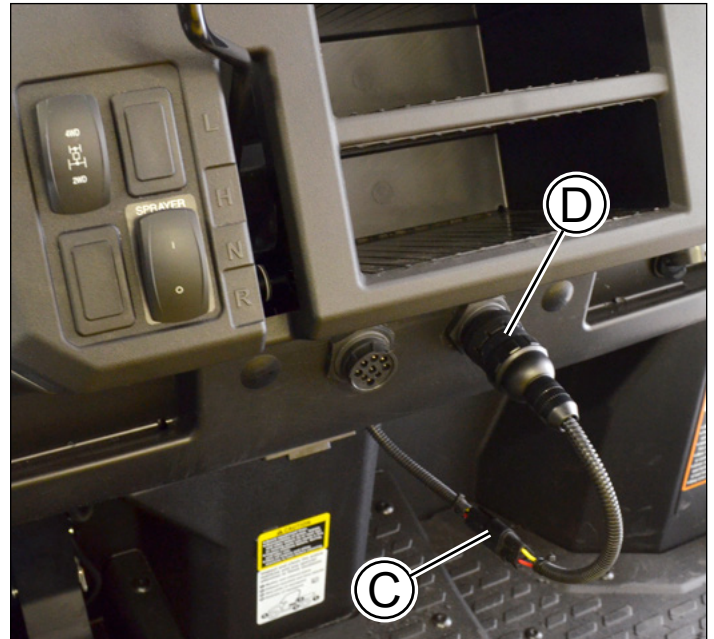

## Chassis Harness Installation

1. Park the vehicle safely and allow to cool.
2. Raise the cargo bed.
3. Plug the chassis harness into the rear power connector (E) and the data connector (F) located on the inside of the rear passenger frame rail.

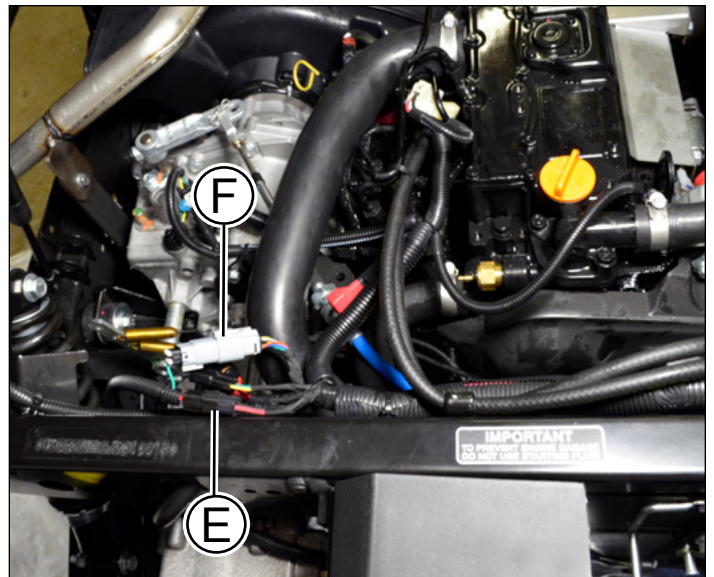




# Installation

4. Route the chassis harness to the outside of the frame rail by going under the frame rail. Route the harness towards the end of the frame rail. Secure the connectors at the end of the frame rails with zip ties (G) and wire harness clips (H).

**Caution:** Failure to secure the harness to the frame rail could cause the harness to get damaged by the wheel or exhaust.

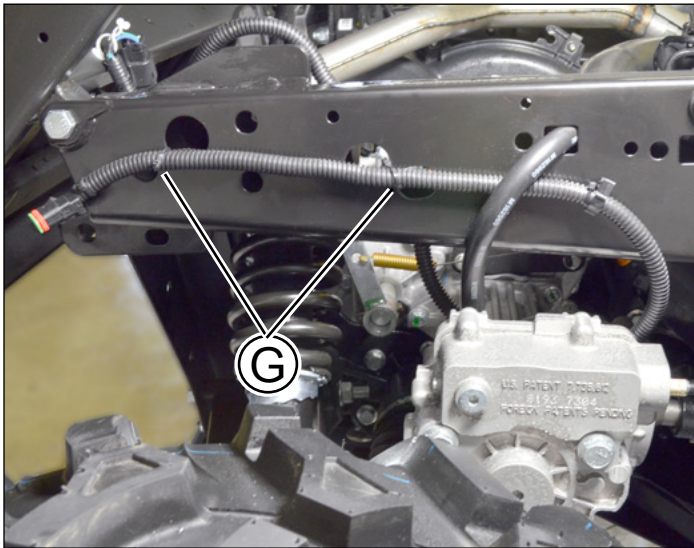


5. Ensure that the harness is secured to prevent any interference with the wheel and cargo bed.
6. Close cargo bed.

## Sprayer Installation

1. Install the sprayer into the cargo bed of the vehicle. 90 Gallon Sprayer shown. Consult your sprayer Operator's Manual for installation instructions.

## Sprayer Wire Harness Installation

1. Mount the relay (A) to the passenger side boom bracket (B).

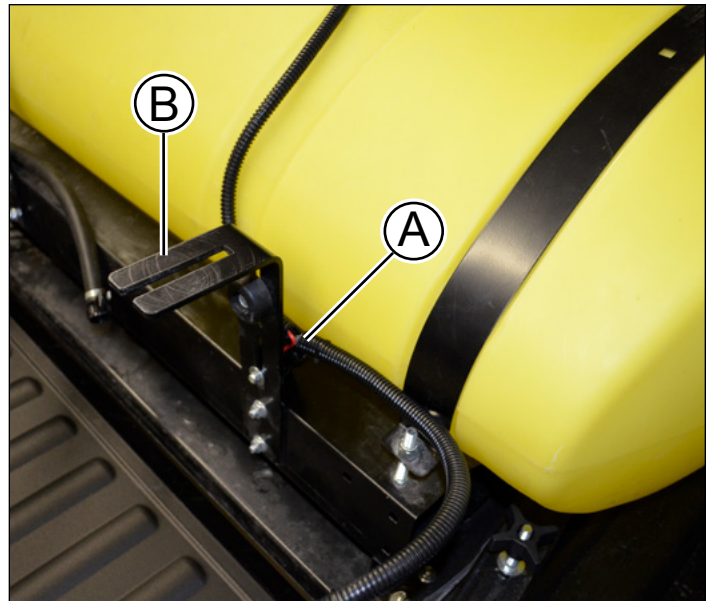

2. Plug the sprayer pump into the harness. Secure any excess wire with a zip tie.
3. Route the wire along the boom bracket and over the tailgate.



4. Connect the two plugs into the mating chassis harness at the end of the passenger frame rail.

# Warranty

## John Deere Quality Continues with Quality Service

John Deere provides a process to handle your questions or problems, should they arise, to ensure that product quality continues with quality parts and service support.

Follow the steps below to get answers to any questions you may have about your product.

1. Refer to your attachment and machine operator manuals.
2. In North America or Canada, call Agri-Fab Customer Service at 1-800-448-9282 and provide product serial number (if available) and model number.

## Limited Warranty for New John Deere Licensed Products


Agri-Fab's attachments are guaranteed to be free from defects in material and workmanship from the date of purchase for 1 year residential use, 6 months commercial use, provided that the purchaser properly assembles, installs, uses and maintains the products in accordance with this manual.

Purchaser's failure to adhere to such requirements will void the warranty. To the extent permitted by applicable law, all other warranties, representations, obligations and conditions, expressed or implied, including but not limited to implied warranties of merchantability, fitness for any particular purpose and non-infringement, are hereby disclaimed and excluded.

Any product which does not meet warranty shall, as purchaser's sole and exclusive remedy, be repaired or replaced by Agri-Fab. This warranty is non-transferable.

- In addition, our warranty does not cover:
- Labor charges.
- Loss or consequential, incidental or special damages of any kind.

This product was manufactured by Agri-Fab, a John Deere Licensee, located at 809 S. Hamilton St, Sullivan, IL 61951. If you have any questions or concerns with the assembly, installation, or operation of this attachment, see your local John Deere dealer or call Agri-Fab at 1-800-448-9282 for assistance.



This page intentionally left blank

This page intentionally left blank