

ZTrak™ MOWERS

RESIDENTIAL ZERO-TURN-RADIUS

Z335E | Z355E | Z525E | Z535M | Z540M | Z535R | Z540R



The way to mow well fast is here.



ZTrak™ Series

Z500R / Z500M / Z500E / Z300E

The way to mow well fast.

John Deere Residential ZTrak™ Mowers are designed with saving you time in mind.

Steer using motion control levers, driven by two durable independent transmissions. These levers are effective over long, level tracks of land or around trees, shrubs and flower beds.

Mow well fast with our new Accel Deep™ Mower Decks, re-engineered to process taller grass at faster speeds.

And have fun.

Run at ground speeds of 7 MPH (11.3 km/h) – 9 MPH (14.5 km/h). Among the fastest in the industry.

Enjoy innovation in design excellence, comfort and fun.

It's all so cool, you may not even notice that we've changed our 2016 lineup name from EZTrak™ to ZTrak, dropping the "E" but keeping the easy. To learn more about how to mow well fast, read on. Or visit us at JohnDeere.com/ResZ or JohnDeere.ca/ResZ.



TABLE OF CONTENTS

Introduction	2
Mower Decks	3
Z500 R Series	4-5
Z500 M Series	6-7
Z500 E Series	8-9
Z300 E Series	10-11
Specifications	12-13

MOWER DECKS

All our mower decks are solid stamped out of steel to meticulous design specifications for a superior cut. The kind of cut each and every backyard deserves.

NEW Accel Deep™ Mower Deck.

The new deeper draw and flat top design create a better quality of cut at faster ground speeds. Perfect for our ZTrak lineup.

Edge™ High Capacity Deck.

Features a smooth underside to process grass at high levels. Deck depth and great airflow lifts grass for exceptional dispersal and a superior cut.

MulchControl™ Option. Mulch when you want with the flip of a lever. Available with Accel Deep™ Decks and 54- and 60-in. High-capacity decks.

Edge Cutting System. Tested and proven. Smooth underside prevents grass buildup and clumping.



Down to the tiniest detail. Designed with you in mind.


Every John Deere Residential ZTrak™ mower is engineered for your comfort and over all quality. A quality cut being at the top of the list.



On-the-go tracking. Adjust tracking for steering and mowing straight the easy way with precision from the comfort of your seat.



Steer with precision. With motion control levers and two integrated transmissions.

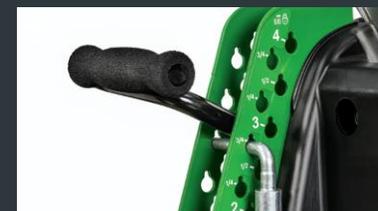

¼ in. height of cut adjustment. Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼ in. (.63 cm) increments for a precision cut.

ZERO TURN ZTRAK™ MOWERS

V-Twin Engine. 20 HP* (14.9 kW) to 25 HP* (18.6 kW). For power, reliability and speed.

Tough, dual integrated transmissions. Smoothly go from zero to top speed quickly and stop on a dime. Over and over again.

Cupholders. Perfect to keep a nice cold beverage close at hand.

Control console. Ergonomic design and color-coded for easy identification.

Wide rear tires. Your overall ride is smoother and much more comfortable. Much, much more comfortable.

Parking brake. Easy to set. Easy to release.

Bumper-to-Bumper Warranty:
A warranty with nothing to hide.

**The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TUWarranty for details.

Z535R / Z540R

This is how to make more time for the important things.

Start with the high-performance, Edge™ High-Capacity deck for a superior cut in all conditions. Sit down in the 21-in. (53 cm) high back seat with Dymetrol™[±] suspension for comfort. Get large, 23-inch drive tires for a smooth ride and a 9-mph (14.5 km/h) ground speed. And get one of the quickest, most comfortable and efficient residential zero-turn mowers you'll find today. Leaving you more time to enjoy your backyard with your whole family.

BUMPER-TO-BUMPER
4-YEAR / 500-HOUR
WARRANTY*



THE LOOK. The contoured panels and spoked wheels offer a sleek design. The ergonomically designed controls are all within easy reach.

Edge™ High Capacity Deck.

48-in (122 cm), 54-in (137 cm) and 60-in (152.4 cm) Smooth underside processes grass at high levels. Deck depth and great airflow lifts grass for exceptional dispersal and a superior cut.



OPTIONAL ERGO STICKS.

Ergonomic design. Accommodates tall or small operators with eighteen adjustment positions.

Speed. 9 MPH (14.5 km/h) top forward ground speed.

NEW Muffler. Exceptional tone quality from a commercial-style canister muffler with noise reduction over other John Deere models. *Only on the Z540R.*

NEW Optional Bumper. Isn't just mean looking, it's tough.



Offset caster wheel.

Optimizes inside corner trim performance and also reduces striping.


MulchControl™ Option.

Mulch when you want with the flip of a lever.

V-Twin Engine. The 24 HP** (17.9 kW) Z540 R has plenty of power. While the 25 HP** (18.6 kW) Z535 R has a commercial quality V-Twin Cyclonic engine.



Fuel Tank. The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

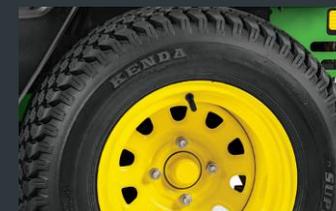

Spoked Wheels. Offer a sleek design.



Foot Deck Lift. Raise and lower your mower deck with the push of a pedal.



The 21-in. (53 cm) high-back seat. Adjusts to your height with flip-up armrests. Large base and cross-section provides a more comfortable platform. Dymetrol suspension offers a "cushier" base.

‡ Dymetrol is a third-party trademark used with permission. *Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TU Warranty for details. **The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

Z535M / Z540M

This is how to mow well fast.

Hit the grass running with a swift 8.5 mph (13.7 km/h) ground speed, powerful engines, integrated transmissions and a quality cut that can keep up thanks to our new 48- and 54-in. Accel Deep™ Mower Decks. Wide rear tires offer a smooth ride across your lawn. Onboard storage lets you keep important items close at hand. And the 18-in. (45.7 cm) seat with armrests, thick cushions and standard seat suspension means your time in the sun is time comfortably spent.



THE LOOK. The contoured panels are sleek. The ergonomically designed, controls are all within easy reach.

BUMPER-TO-BUMPER
4-YEAR /300-HOUR
WARRANTY*


Speed. 8.5 MPH (13.7 km/h) forward ground speed.

NEW Accel™ Deep Mower Deck. 48-in. (122 cm) and 54-in. (137 cm). The new deeper “draw” and flat top design create a better quality of cut at faster ground speeds.

NEW MulchControl kit option for Accel™ Deep Mower Deck. Mulch the easy way with the flip of a lever.

Edge Cutting System. 62-in. (157 cm). Smooth under-side prevents grass buildup and clumping. *Z540M only.*

V-Twin Engine. The 24 HP** (17.9 kW) Z540M has plenty of power. While the 25 HP** (18.6 kW) Z535M has a commercial quality V-Twin Cyclonic engine.

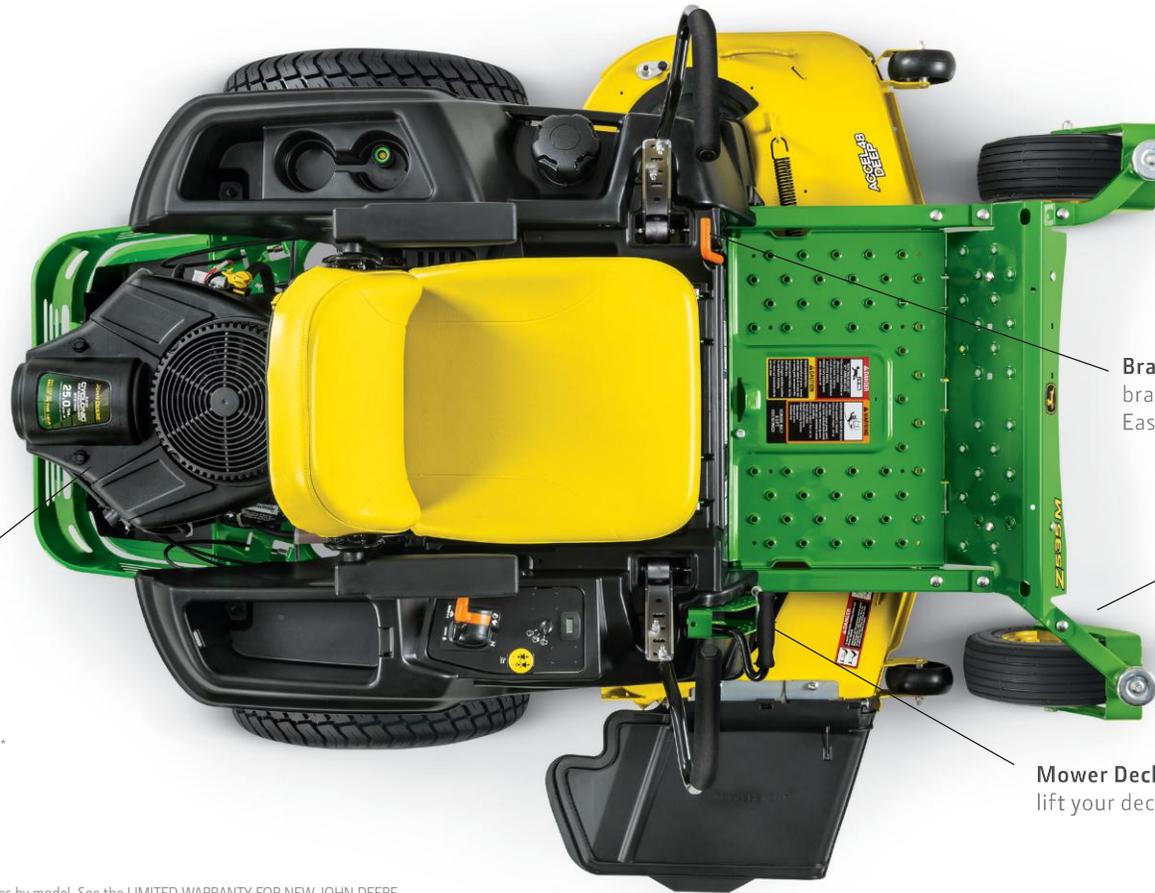

Brake. Set or release your brake with the lift of a lever. Easier than ever.


Offset caster wheel. Optimizes inside corner trim performance and also reduces striping.

Mower Deck Lift. Lower or lift your deck with ease.

*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TU Warranty for details. **The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.



The 18-in (45.7 cm) seat. With flip up arm rests. Height adjustable. Features suspension support for extra comfort.

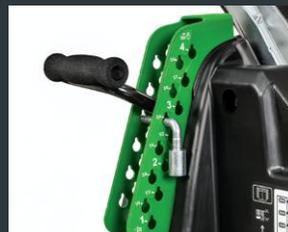

¼ in. height of cut adjustment. Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼ in. (.63 cm) increments for a precision cut.



Fuel Tank. The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

Z525E

This is how to find “Me Time.”

Mow well fast with a 8.5 MPH (13.7 km/h) forward ground speed here as well. You'll eat up long level tracks of land in no time. Go on. The NEW Accel Deep™ Mower Deck is designed to keep up. Then there's the generous, 4.5 gallon (17 l) fuel tank for fewer fill-ups and the comfortable 15-in. (38.1 cm) seat to make your time out, a more pleasant time at that. “Me Time” indeed.





V-Twin Engine. 22 HP** (16.4 kW). For plenty of power, quick starts, reliability and speed.



Control Panel. The ergonomically designed controls are color-coded.

THE LOOK. The contoured panels are sleek. The ergonomically designed controls are all within easy reach.

BUMPER-TO-BUMPER 2-YEAR /120-HOUR WARRANTY*



Speed. 8.5 MPH (13.7 km/h) ground speed.

On-the-go tracking adjustment. Mow straight the easy way. The way it ought to be.

¼ in height of cut adjustment. Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼ in. (.63 cm) increments for a precision cut

Offset caster wheel. Optimizes inside corner trim performance and also reduces striping.

Fuel Tank. The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

15-in (38.1 cm) seat. With adjustable armrests for comfort.

Mower Deck Lift. Lower or lift your deck with ease.

Brake. Set or release your brake with the lift of a lever. Easier than ever.

Wide rear tires. Overall ride is smooth and much more comfortable.

NEW Accel Deep™ Mower Deck. 48-in. (122 cm) and 54-in. (137 cm.) The new deeper “draw” and flat top design create a better quality of cut at faster ground speeds.

Available with MulchControl. Mulch when you want with the flip of a lever.

*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TU Warranty for details. **The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

Z335E / Z355E



This is how to make time to smell the flowers.

First, there's our durable, thick frame and tough, maintenance-free transmission and our skillfully engineered steering design. Count on them.

Then, there's storage for easy access to your gear and the large, smooth riding, 18-inch (45.7 cm) rear drive tires. Nice.

Add the 1- to 4-inch (2.5-10.2 cm) height-of-cut adjustment in 1/4-inch, 6.3 mm increments for a consistently superior cut to our new Accel Deep™ Mower Deck (Z335E only) for mowing well fast with our 7 MPH (11.3 km/h) forward ground speed.



The control panel. Ergonomic design and color-coded for easy identification.

Throttle. Slows you down and speeds you up.

PTO. Engage and disengage easily.

Ignition Key. Car-like and easy.



Mower decks. Solid stamped out of steel to meticulous design specifications for a superior cut.

Edge Cutting System. 48-in (122 cm.) Smooth underside prevents grass buildup and clumping. *Available on the Z355E.*

NEW Accel Deep™ Mower Deck. 42-in (107 cm.) The new deeper “draw” and flat top design create a better quality of cut at faster ground speeds. *Available on the Z335E.*

NEW MulchControl Option. 42-in (107 cm.) Mulch when you want with the flip of a lever. *Available on the Z335E.*

*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TUWarranty for details. **The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

THE LOOK. The strong sturdy construction and ergonomic design make the Z300 E Series feel easy and approachable.

Speed. 7 MPH (11.3 km/h) ground speed.

On-the-go tracking. Mow straight the easy way. The way it ought to be.

Armrests. With 15-in (38.1 cm) seat. Because they're comfortable. *Available on the Z355E.*

Low fuel level warning light. Alerts you when it's time to fill up.

¼ in height of cut adjustment. Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼ in. (.63 cm) increments for a precision cut.

V-Twin Engine. 20 HP** (14.9 kW) in the Z335E and 22 HP** (16.4 kW) in the Z355E. For power, reliability and speed.

Tough, dual integrated transmissions. Go from zero to top speed quickly and stop on a dime. Over and over again.

**BUMPER-TO-BUMPER
2-YEAR /120-HOUR
WARRANTY***

Steer with precision. Adjustable motion control levers and two integrated transmissions.

Wide rear tires. Overall ride is smooth and much more comfortable.



ZTrak™ Series

Specifications

		Z335E	Z355E	Z525E
Engine	Horsepower*	20 hp (14.9 kW)	22 hp (16.4 kW)	22 hp (16.4 kW)
	Model No.	M40 Intek	M44 Intek	M44 ELS
	Displacement	40 cu in. (656 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)
	Cylinders	V-twin	V-twin	V-twin
	Oil Filter	Yes	Yes	Yes
	Lubrication	Full pressure, 2.0 U.S. qt (1.9 L)	Full pressure, 2.0 U.S. qt (1.9 L)	Full pressure, 2.0 U.S. qt (1.9 L)
	Cooling	Air	Air	Air
Fuel System	Fuel Type	Gas	Gas	Gas
	Fuel Tank Capacity	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	4.5 U.S. gal. (17 L)
	Fuel Fill Diameter	2 in. (5.1 cm)	2 in. (5.1 cm)	3 in. (7.6 cm)
	Fuel Indication	Low Fuel Indicator	Low Fuel Indicator	Sight window
Electrical System	Battery Voltage	12 volt	12 volt	12 volt
	Cold Cranking Amps	300	300	300
	Hourmeter	Standard	Standard	Standard
Drive Train	Dual Hydros	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Tuff Torq TZT7-D w/1-in. (2.5 cm) axles
Travel Speed	Forward	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-8.5 mph (0-13.7 km/h)
	Reverse	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-4 mph (0-6.4 km/h)
	Speed and Direction Control	Twin levers	Twin levers	Twin levers
	Control Adjustment	2-height / 18 positions	2-height / 18 positions	3-height / 18 positions
Tires	Front Caster Tires	11x4.0-4	11x4.0-4	13x5.0-6
	Drive Tires	18x8.50-8	18x8.50-8	22x9.50-10
Seat	Height	15 in. (38.1 cm) medium-back	15 in. (38.1 cm) medium-back	15 in. (38.1 cm) medium-back
	Armrests	No	Yes	Yes
	Fore-aft Adjustment	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm) while seated
Mower Deck	Cutting Width	42 in. (107 cm)	48 in. (122 cm)	48 in. (122 cm)/ 54 in. (137 cm)
	Type	Side discharge	Top discharge	Side discharge
	Mower Deck Material	12 gauge, 0.105 in. (2.7 mm)	12 gauge, 0.105 in. (2.7 mm)	10 gauge, 0.135 in. (3.4 mm)
PTO	Type	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 125 lb-ft
	Drive	Belt	Belt	Belt
Dimensions	Wheelbase	47.5 in. (121 cm)	50.3 in. (127 cm)	48.7 in. (123.7 cm)
	Overall Length	72.2 in. (183.5 cm)	75.1 in. (183.2 cm)	76.7 in. (194.8 cm)
	Height, in. (cm)	36.3 in. (92.2 cm)	36.3 in. (92.2 cm)	39.4 in. (100.1 cm)
	Weight (with fuel), lb (kg)	491 lb (223 kg)	507 lb (230 kg)	615 lb (279 kg) w/ 48-in. mower/ 631 lb (286 kg) w/ 54-in. mower
Limited Warranty*		2 year/120 hour	2 year/120 hour	2 year/120 hour

**The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TUWarranty for details.

Z535M	Z540M	Z535R	Z540R
25 hp (18.6 kW)	24 hp (17.9 kW)	25 hp (18.6 kW)	24 hp (17.9 kW)
M44 Cyclonic	FS730V	M44 Cyclonic	FS730V
44.2 cu in. (724 cc)	44.3 cu in. (726 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)
V-twin	V-twin	V-twin	V-twin
Yes	Yes	Yes	Yes
Full pressure, 2.0 U.S. qt (1.9 L)	Full pressure, 2.2 U.S. qt (2.1 L)	Full pressure, 2.0 U.S. qt (1.9 L)	Full pressure, 2.2 U.S. qt (2.1 L)
Air	Air	Air	Air
Gas	Gas	Gas	Gas
4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)
3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)
Sight window	Sight window	Sight window	Sight window
12 volt	12 volt	12 volt	12 volt
300	300	300	300
Standard	Standard	Standard	Standard
Tuff Torq TZT7-D w/1-in. (2.5 cm) axles	Tuff Torq TZT7-D w/1-in. (2.5 cm) axles	Tuff Torq TZT7-M w/1-in. (2.5 cm) axles	Tuff Torq TZT7-M w/1-in. (2.5 cm) axles
0-8.5 mph (0-13.7 km/h)	0-8.5 mph (0-13.7 km/h)	0-9 mph (0-14.5 km/h)	0-9 mph (0-14.5 km/h)
0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h)	0-4.5 mph (0-7.2 km/h)	0-4.5 mph (0-7.2 km/h)
Twin levers	Twin levers	Twin levers	Twin levers
3-height / 18 positions	3-height / 18 positions	3-height / 18 positions	3-height / 18 positions
13x5.0-6	13x5.0-6	13x6.5-6	13x6.5-6
22x9.50-10	22x9.50-10	23x10.50-12	23x10.50-12
18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	20 in. (50.8 cm) high-back	20 in. (50.8 cm) high-back
Yes	Yes	Yes	Yes
3 in. (7.6 cm) while seated	3 in. (7.6 cm) while seated	4.5 in. (11.4 cm) while seated	4.5 in. (11.4 cm) while seated
48 in. (122 cm)/ 54 in. (137 cm)	48 in. (122 cm)/ 54 in. (137 cm)/62 in. (157 cm)	54 in. (137 cm)	48 in. (122 cm)/ 54 in. (137 cm)/60 in. (152 cm)
Side discharge	Side discharge	High capacity side discharge	High capacity side discharge
10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	9 gauge, 0.150 in. (3.8 mm)	9 gauge, 0.150 in. (3.8 mm)
Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft
Belt	Belt	Belt	Belt
48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)
76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)
42 in. (106.7 cm)	42 in. (106.7 cm)	46.1 in. (117.1 cm)	46.1 in. (117.1 cm)
615 lb (279 kg) w/ 48-in. mower/ 631 lb (286 kg) w/ 54-in. mower	638 lb (289 kg) w/ 48-in. mower/654 lb (297 kg) w/ 54-in. mower/ 687 lb (312 kg) w/ 62-in. mower	710 lb (322 kg)	697 lb (316 kg) w/ 48-in. mower/717 lb (325 kg) w/ 54-in. mower/ 738 lb (335 kg) w/ 60-in. mower
4 year/300 hour	4 year/300 hour	4 year/500 hour	4 year/500 hour



JohnDeere.com | JohnDeere.ca

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color scheme, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company.

DSTA65249 (12-15)



Nothing runs like a Deere™