


# ZTrak<sup>™</sup> MOWERS

RESIDENTIAL ZERO-TURN-RADIUS

Z335E | Z355E | Z335M | Z345M | Z345R | Z355R | Z375R | Z525E | Z535M | Z540M | Z535R | Z540R



It's not how fast you mow.  
It's how well you mow fast.<sup>™</sup>  
Now available in your backyard.

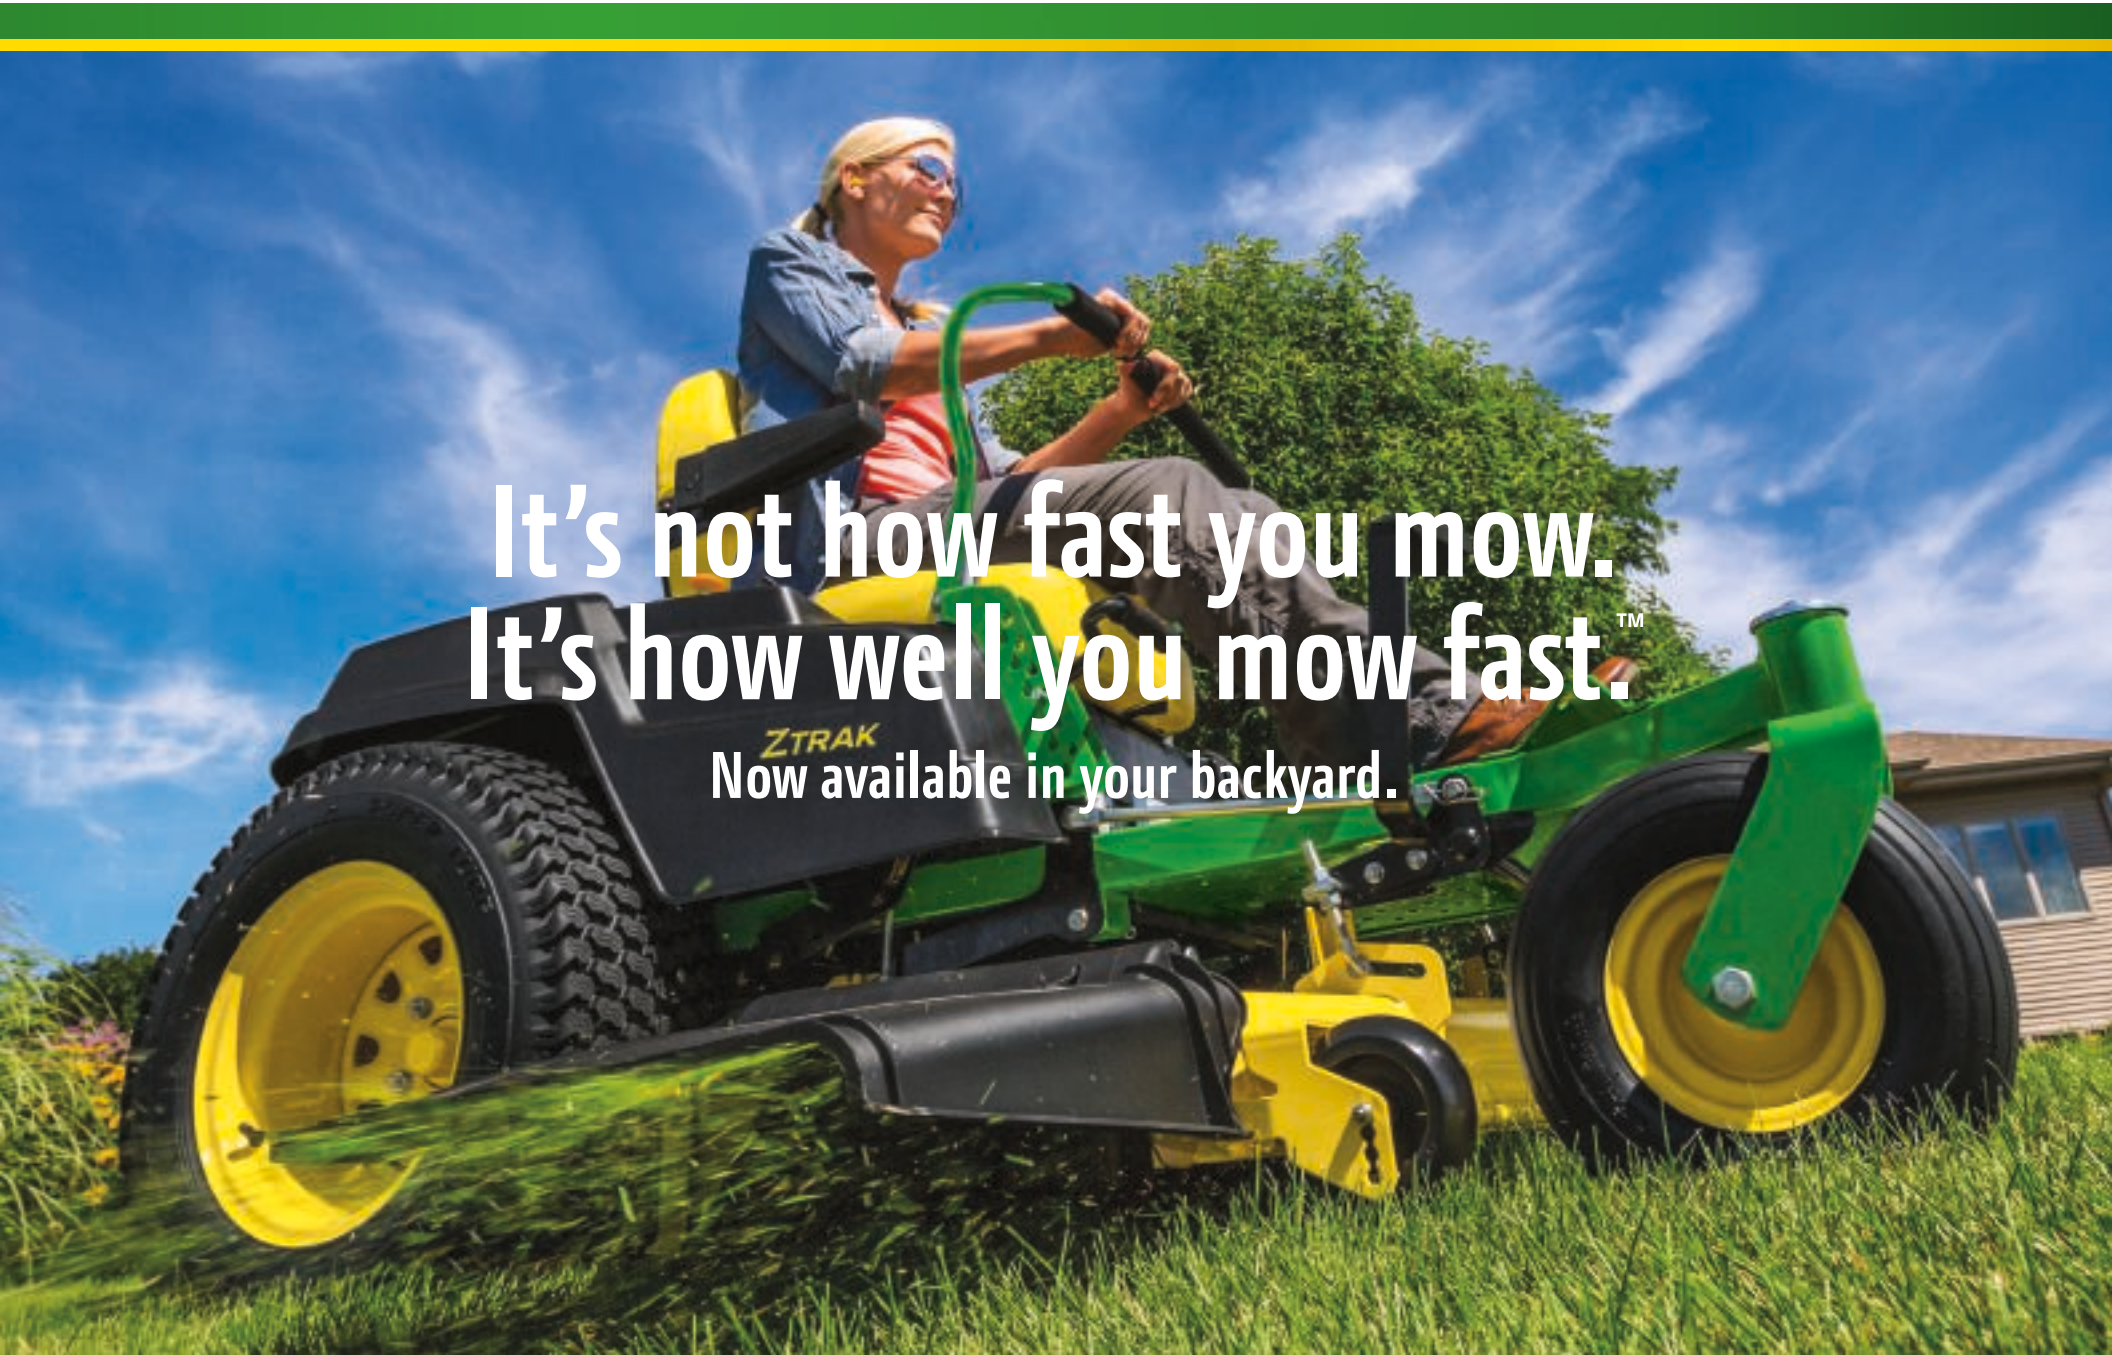



A woman with blonde hair tied back, wearing sunglasses, a blue t-shirt, and jeans, is riding a green and yellow John Deere Z335M ZTRAK zero-turn mower. She is smiling and looking towards the right. The mower is on a green lawn, and in the background, there are several houses with gabled roofs and trees under a clear blue sky. The text "RESIDENTIAL ZERO TURN ZTRAK™ MOWERS" is in the top right corner, and "This is how to mow like you mean it." is overlaid in the center.

## RESIDENTIAL ZERO TURN ZTRAK™ MOWERS

This is how to mow like you mean it.

The word is spreading fast across John Deere neighborhoods all over North America. It's not how fast you mow, it's how well you mow fast.™ Words to mow by.

To help you be a part of it, our 2017 lineup introduces five models to our economical and easy-to-use Z300 Series line. Get to know the Z335M, Z345M, Z345R, Z355R, and the Z375R.

Here's another update. The 48-in Accel Deep™ Mower Deck is now available on the Z355E. In fact, the Z300 Series lineup now offers Accel Deep™ Mower Deck sizes up to 54-in. (137 cm), just like our Z500 Series lineup. Mowing well has never been easier, more cost-friendly or fast.



## TABLE OF CONTENTS

Introduction	2-5
Z500 Series	6
Z500 R Series	7
Z500 M Series	8
Z500 E Series	9
Z300 Series	10
Z300 R Series	11
Z300 M Series	12
Z300 E Series	13
Specifications	14-15

Looking for big? Don't miss the 62-in. (157 cm) Edge Cutting System Deck now available on the Z535M. It's how to mow well big.

Of course, you can count on the full lineup for legendary John Deere speed, quality and durability—all standard. Every page will give you something to talk about. You really will come to see, "It's not how fast you mow. It's how well you mow fast."<sup>TM</sup>

Visit us at [JohnDeere.com](http://JohnDeere.com) or [JohnDeere.ca](http://JohnDeere.ca).



42-in. Accel Deep<sup>TM</sup> Deck

## MOWER DECKS

All of our mower decks are solid stamped out of steel to meticulous design specifications for a superior cut. The kind of cut each and every backyard deserves.

### Accel Deep<sup>TM</sup> Mower Deck.

The deep draw and flat top design deliver a superior quality of cut at faster ground speeds. Perfect for our ZTrak lineup.

### The High-Capacity Mower Deck

Stamped from 9-gauge steel, with additional deck depth for better airflow, exceptional clipping dispersal, and a premium cut.

**MulchControl<sup>TM</sup> Option.** Mulch when you want with the flip of a lever. Available with Accel Deep<sup>TM</sup> Decks and 54- (137 cm) and 60-in. (152.4 cm) High-Capacity decks.

**Edge Cutting System.** Tested and proven. Smooth underside prevents grass buildup and clumping.





**Down to the tiniest detail. Designed with you in mind.**

Every John Deere Residential ZTrak™ mower is engineered for your comfort and overall quality. A quality cut being at the top of the list.



# RESIDENTIAL ZERO TURN ZTRAK™ MOWERS



**On-the-go tracking adjustment.**  
Adjust tracking for steering and mowing straight the easy way with precision from the comfort of your seat.



**Steer with precision.** With motion control levers and two integrated transmissions.



**¼ in. height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.



**Cupholders.**  
Perfect to keep a beverage close at hand.

**V-Twin Engine.** 20 HP\* (14.9 kW) to 25 HP\* (18.6 kW). For power, reliability, and speed.

**Control console.**  
Ergonomic design and color-coded for easy identification.

**Tough, dual integrated transmissions.**  
Smoothly go from zero to top speed quickly and stop on a dime. Over and over again.

**MulchControl™ Option.**  
A John Deere exclusive, mulches when you want with a flip of a lever.

**Wide rear tires.** Your overall ride is smoother and much more comfortable. Much, much more comfortable.

**Parking brake.**  
Easy to set.  
Easy to release.

**Bumper-to-Bumper Warranty\*\*.**  
A warranty with nothing to hide.

\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information. \*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details.



## RESIDENTIAL Z500 SERIES ZERO TURN ZTRAK™ MOWERS

**This is how cut quality and speed come full circle.**

Start with a superior cut. Sit down in comfort. Get a smooth ride and a 8.5-mph (13.5 km/h) or 9-mph (14.5 km/h) ground speed. And get one of the quickest, most comfortable, and efficient residential zero-turn mowers you'll find today. Leaving you with no doubt: It's not how fast you mow. It's how well you mow fast.™



## BUMPER-TO-BUMPER 4-YEAR/500-HOUR WARRANTY\*

# Z500 R SERIES AT A GLANCE

**The look.** The contoured panels and spoked wheels offer a sleek design. The ergonomically designed controls are all within easy reach.

Z535R | Z540R

**The High-Capacity Deck.** 48-in. (122 cm), 54-in. (137 cm), and 60-in. (152.4 cm). Smooth underside processes grass at high levels. Deck depth and great airflow lifts grass for exceptional dispersal and a superior cut.

**Speed.** 9 mph (14.5 km/h) top forward ground speed.

**Muffler.** Exceptional tone quality from a commercial-style canister muffler with noise reduction over other John Deere models. *Only on the Z540R.*

**Optional Hitch.** Hitch up a cart and carry the day when it comes to garden beds and vegetable plots.


**Offset caster wheel.** Optimizes inside corner trim performance and also reduces striping.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**V-Twin Engine.** The 24 HP\*\* (17.9 kW) Z540R has plenty of power. While the 25 HP\*\* (18.6 kW) Z535R has a commercial quality V-Twin Cyclonic engine.



**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.



**Spoked Wheels.** Offer a sleek design.



**Foot Deck Lift.** Raise and lower your mower deck with the push of a pedal.



**The 21-in. (53 cm) high-back seat.** Adjusts to your height with flip-up armrests. Large base and cross-section provides a more comfortable platform. Dymetrol® suspension offers a "cushier" base.

† Dymetrol is a third-party trademark used with permission. \*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TU](http://www.JohnDeere.ca/TU) Warranty for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.



# Z500 M SERIES AT A GLANCE

Z535M | Z540M

**Speed.** 8.5 mph (13.7 km/h) forward ground speed.

**Accel Deep™ Mower Deck.** 48-in. (122 cm) and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ kit option for Accel Deep™ Mower Deck.** Mulch the easy way with the flip of a lever.


**Edge Cutting System.** 62-in. (157 cm). Smooth underside prevents grass buildup and clumping. *Now available on the Z535M and Z540M.*

**V-Twin Engine.** The 24 HP\*\* (17.9 kW) Z540M has plenty of power, while the 25 HP\*\* (18.6 kW) Z535M has a commercial quality V-Twin Cyclonic engine.

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

**The look.** The contoured panels are sleek. The ergonomically designed, controls are all within easy reach.

**BUMPER-TO-BUMPER**  
**4-YEAR/300-HOUR**  
**WARRANTY\***

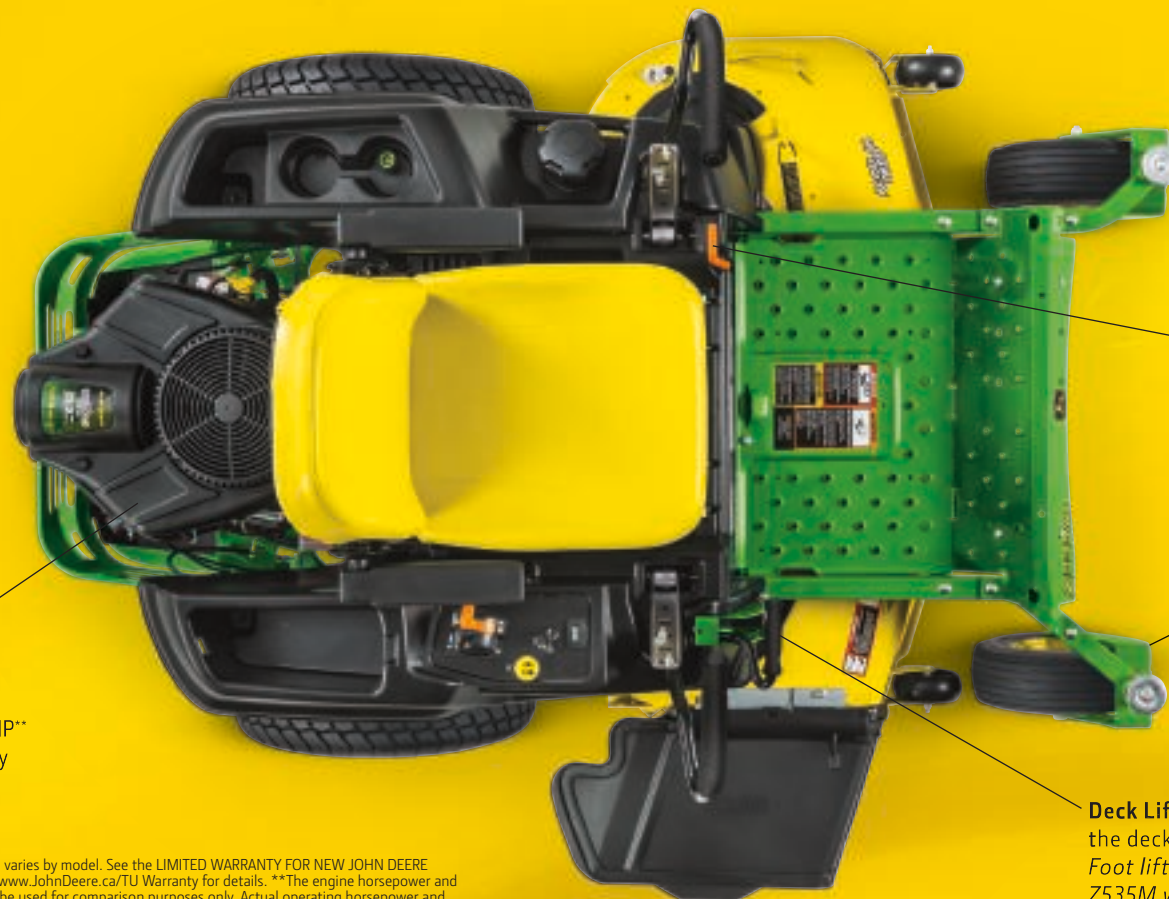

**Brake.** Set or release your brake with the lift of a lever. Easier than ever.

**Offset caster wheel.** Optimizes inside corner trim performance and also reduces striping.

**Deck Lift.** Raise and lower the deck quickly and easily. *Foot lift available on the Z535M with 62-in. (157 cm) Edge Cutting System.*



**The 18-in. (45.7 cm) seat.** With flip-up armrests. Height adjustable. Features suspension support for extra comfort.



**1/4 in. height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in 1/4-in. (.63 cm) increments for a precision cut.



**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.



## BUMPER-TO-BUMPER 2-YEAR/120-HOUR WARRANTY

## Z500 E SERIES AT A GLANCE

Z525E

**Mower Deck Lift.** Lower or lift your deck with ease.

**15-in. (38.1 cm) seat.** With adjustable armrests for comfort.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**¼ in height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.

**Wide rear tires.** Overall ride is smooth and much more comfortable.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**Accel Deep™ Mower Deck.** 48-in. (122 cm) and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**Speed.** 8.5 mph (13.7 km/h) ground speed.

**Brake.** Set or release your brake with the lift of a lever. Easier than ever.

**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

**The look.** The contoured panels are sleek. The ergonomically designed controls are all within easy reach.

**Offset caster wheel.** Optimizes inside corner trim performance and also reduces striping.

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TU](http://www.JohnDeere.ca/TU) Warranty for details.



## RESIDENTIAL Z300 SERIES ZERO TURN ZTRAK™ MOWERS

A woman with brown hair, wearing sunglasses, a light blue plaid shirt, and blue jeans, is sitting on a yellow and green John Deere ZTRAK zero-turn mower. She is holding the steering levers and looking off to the side. The mower is on a green lawn with a dense line of trees in the background. The sky is blue with some white clouds. The text "ZTRAK" and "JOHN DEERE" are visible on the side of the mower.

**This is how to mow well for a small price.**

First, there are five new models for you to think about. Then there's our durable, thick frame and tough, maintenance-free dual transmission, and our skillfully engineered steering design. Count on them.

There are comfortable seats, storage for easy access to your gear, and smooth riding rear drive tires. Nice.

Add the 1- to 4-inch (2.5-10.2 cm) height-of-cut adjustment in 1/4-in. (6.3 mm) increments for a consistently superior cut with our Accel Deep™ Mower Deck and our 7 mph (11.3 km/h) forward ground speed, and you can really see why It's not how fast you mow, it's how well you mow fast™ is at home in your backyard.



# Z300 R AT A GLANCE



**V-Twin Engine.** 22 HP\*\* (16.4 kW) for plenty of power, quick starts, reliability, and speed in the Z345R and Z355R. A 25 HP\*\* (18.6 kW) ELS engine is in the Z375R.



**Control Panel.** The ergonomically designed controls are color-coded.

**BUMPER-TO-BUMPER  
2-YEAR/120-HOUR  
WARRANTY\***

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TU Warranty for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

## Z345R | Z355R | Z375R

**The look.** The strong sturdy construction and ergonomic design make the Z300 R Series feel easy and approachable.

**Floor mats, standard.** Protect against muddy boots with a mind of their own.

**Premium dual control levers.** The new, curved levers belong in your hands.

**Large front and rear tires.** Overall ride is smooth and much more comfortable.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.

**Offset caster wheel.** Optimizes inside corner trim performance and also reduces striping. *Not available on the Z345.*

**Foot Pedal Mower Deck Lift.** Lower or lift your deck with ease.

**Accel Deep™ Mower Deck.** 42-in. (102 cm), 48-in. (122 cm), and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**Ready Start™ engine.** Choke-free and easy to start.

**17-in. (43.2 cm) seat.** Adjusts tool-free with armrests for comfort.

**25 HP\*\* Extended Life Series engine.** (Z375R) and 22 HP Intek engine (Z355R and Z345R).

**Speed.** 7 mph (11.3 km/h) ground speed.





# Z300 M SERIES AT A GLANCE

Z335M | Z345M

**The look.** The strong sturdy construction and ergonomic design make the Z300 M Series feel easy and approachable.

**Steer with precision.** Adjustable motion control levers and two integrated transmissions.

**18-in. (45.7 cm) seat.** Adjusts tool-free with armrests for comfort.

**Speed.** 7 mph (11.3 km/h) ground speed.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.



**Accel Deep™ Mower Deck.** 42-in. (102 cm) and 48-in. (122 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**Ready Start™ engine.** Choke-free and easy to start.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**22 HP\*\* (16.4 kW, 724cc) Intek engine.** With power to spare.



**The control panel.** Ergonomic design and color-coded for easy identification.

**Throttle.** Slows you down and speeds you up.

**PTO.** Engage and disengage easily.

**Ignition Key.** Car-like and easy.



**Mower decks.** Solid stamped out of steel to meticulous design specifications for a superior cut.

**Accel Deep™ Mower Deck.** 42-in. (107 cm.) and 48-in. (122 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** 42-in. (107 cm.) and 48-in. (122 cm). Mulch when you want with the flip of a lever.

\*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.



# Z300 E SERIES AT A GLANCE

Z335E | Z355E

**Steer with precision.** Adjustable motion control levers and two integrated transmissions.

**V-Twin Engine.** 20 HP\*\* (14.9 kW) in the Z335E and 22 HP\*\* (16.4 kW) in the Z355E. For power, reliability and speed.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.

**Speed.** 7 mph (11.3 km/h) ground speed.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**The look.** The strong sturdy construction and ergonomic design make the Z300 E Series feel easy and approachable.

**Armrests.** With 15-in. (38.1 cm) seat. Because they're comfortable. Standard on the Z355E.

**Wide rear tires.** Overall ride is smooth and much more comfortable.

**¼ in height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TU](http://www.JohnDeere.ca/TU) Warranty for details.

**BUMPER-TO-BUMPER**  
**2-YEAR/120-HOUR**  
**WARRANTY\***



# ZTrak™ Series

## Specifications

		Z335E/Z355E	Z335M	Z345M	Z345R	Z355R
Engine	Horsepower*	20 hp* (14.9 kW)/22 hp* (16.4 kW)	20 hp* (14.9 kW)	22 hp* (16.4 kW)	22 hp* (16.4 kW)	22 hp* (16.4 kW)
	Model No.	M40 Intek/M44 Intek	M40 Intek	M44 Intek	M44 Intek	M44 Intek
	Displacement	40 cu in. (656 cc)/44.2 cu in. (724 cc)	40 cu in. (656 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)
	Cylinders	V-twin	V-twin	V-twin	V-twin	V-twin
	Replaceable Oil Filter	Yes	Yes	Yes	Yes	Yes
	Cooling Method	Air	Air	Air	Air	Air
Fuel System	Fuel Type	Gas	Gas	Gas	Gas	Gas
	Fuel Tank Capacity	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)
	Fuel Fill Diameter	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)
	Fuel Indication	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator
Electrical System	Battery Voltage	12 volt	12 volt	12 volt	12 volt	12 volt
	Cold Cranking Amps	300	300	300	300	300
	Hourmeter	Standard	Standard	Standard	Standard	Standard
Drive Train	Dual Hydros	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles
	Forward Speed, mph (km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)
	Reverse Speed, mph (km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)
	Speed and Direction Control	Twin levers	Twin levers	Twin levers	Twin premium levers	Twin premium levers
	Control Adjustment	2-height/18 positions	2-height/18 positions	2-height/18 positions	2-height/18 positions	2-height/18 positions
Tires	Front Caster Tires	11x4.0-5/13x5.0-6	11x4.0-5	11x4.0-5	11x4.0-5	13x5.0-6
	Drive Tires	18x8.50-8/20x9.0-10	18x8.50-8	18x8.50-8	18x8.50-8	20x9.0-10
	Rubber Floor Mat	Optional	Optional	Optional	Standard	Standard
Seat	Seat Back Height	15 in. (38.1 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back
	Armrests	No/Yes	Yes	Yes	Yes	Yes
	Fore-aft Adjustment	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)
Lift System	Type	Hand lever, optional foot lift	Hand lever, optional foot lift	Hand lever, optional foot lift	Foot lift and hand lever standard	Foot lift and hand lever standard
PTO	Type	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft
	Drive	Belt	Belt	Belt	Belt	Belt
Mower Deck	Width of Cut	42 in. (107 cm)/48 in. (122 cm)	42 in. (107 cm)	42 in. (107 cm)	42 in. (107 cm)	48 in. (122 cm)
	Type	Side Discharge	Side Discharge	Side Discharge	Side Discharge	Side Discharge
	Mower Deck Material	12 gauge, 0.105 in. (2.7 mm)/10 gauge, 0.135 in. (3.4 mm)	12 gauge, 0.105 in. (2.7 mm)	12 gauge, 0.105 in. (2.7 mm)	12 gauge, 0.105 in. (2.7 mm)	10 gauge, 0.135 in. (3.4 mm)
Dimensions	Wheelbase, in. (cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)
	Overall Length, in. (cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)
	Height, in. (cm)	36.3 in. (92.2 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)
	Weight (with fuel), lb (kg)	419 lb (190 kg)/555 lb (252 kg)	419 lb (190 kg)	419 lb (190 kg)	423 lb (192 kg)	449 lb (204 kg)
Limited Warranty**		2-year/120-hour	2-year/120-hour	2-year/120-hour	2-year/120-hour	2-year/120-hour

\*Per SAE J1940 as rated by engine manufacturer. The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

\*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details.



<b>Z375R</b>	<b>Z525E</b>	<b>Z535M</b>	<b>Z540M</b>	<b>Z535R</b>	<b>Z540R</b>
25 hp* (18.6 kW)	22 hp* (16.4 kW)	25 hp* (18.6 kW)	24 hp* (17.9 kW)	25 hp* (18.6 kW)	24 hp* (17.9 kW)
M44 ELS	M44 ELS	M44 Cyclonic	FS730V	M44 Cyclonic	FS730V
44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)
V-twin	V-twin	V-twin	V-twin	V-twin	V-twin
Yes	Yes	Yes	Yes	Yes	Yes
Air	Air	Air	Air	Air	Air
Gas	Gas	Gas	Gas	Gas	Gas
2.1 U.S. gal. (8 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)
2 in. (5.1 cm)	3 in. (17.03 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)
Low Fuel Indicator	Yes	Yes	Yes	Yes	Yes
12 volt	12 volt	12 volt	12 volt	12 volt	12 volt
300	300	300	300	300	300
Standard	Standard	Standard	Standard	Standard	Standard
Hydro-Gear EZT w/1-in. (2.5 cm) axles	Tuff Torq TZT7-D w/1-in. (2.5 cm) axles	Tuff Torq TZT7-D w/1-in. (2.5 cm) axles	Tuff Torq TZT7-D w/1-in. (2.5 cm) axles	Tuff Torq TZT7-M w/1-in. (2.5 cm) axles	Tuff Torq TZT7-M w/1-in. (2.5 cm) axles
0-7 mph (0-11.3 km/h)	0-8.5 mph (0-13.7 km/h)	0-8.5 mph (0-13.7 km/h)	0-8.5 mph (0-13.7 km/h)	0-9 mph (0-14.5 km/h)	0-9 mph (0-14.5 km/h)
0-3.5 mph (0-5.6 km/h)	0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h)	0-4.5 mph (0-7.2 km/h)	0-4.5 mph (0-7.2 km/h)
Twin premium levers	Twin levers	Twin levers	Twin levers	Twin premium levers	Twin premium levers
2-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions
13x5.0-6	13x5.0-6	13x5.0-6	13x5.0-6	13x6.5-6	13x6.5-6
20x9.0-10	22x9.50-10	22x9.50-10	22x9.50-10	23x10.50-12	23x10.50-12
Standard	Optional	Optional	Optional	Standard	Standard
18 in. (45.7 cm) medium-back	15 in. (38.1 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	20 in. (50.8 cm) high-back	20 in. (50.8 cm) high-back
Yes	Yes	Yes	Yes	Yes	Yes
2.5 in. (6.35 cm)	3 in. (7.6 cm) while seated	3 in. (7.6 cm) while seated	3 in. (7.6 cm) while seated	4.5 in. (11.4 cm) while seated	4.5 in. (11.4 cm) while seated
Foot lift and hand lever standard	Hand lever, optional foot lift	Hand lever, optional foot lift	Hand lever, optional foot lift	Foot lift and hand lever standard	Foot lift and hand lever standard
Electric, 105 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft
Belt	Belt	Belt	Belt	Belt	Belt
54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)/ 62 in. (157 cm)	48 in. (122 cm)/54 in. (137 cm)/ 62 in. (157 cm)	54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)/ 62 in. (152 cm)
Side Discharge	Side discharge	Side discharge	Side discharge	High capacity side discharge	High capacity side discharge
10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	9 gauge, 0.150 in. (3.8 mm)	9 gauge, 0.150 in. (3.8 mm)
47.5 in. (121 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)
72.2 in. (183.5 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)
40.1 in. (101.9 cm)	39.4 in. (100.1 cm)	42 in. (106.7 cm)	42 in. (106.7 cm)	46.1 in. (117.1 cm)	46.1 in. (117.1 cm)
452 lb (205 kg)	615 lb (279 kg)/631 lb (287 kg)	631 lb (287 kg)/631 lb (287 kg)/ 687 lb (312 kg)	638 lb (289 kg)/654 lb (297 kg)/ 687 lb (312 kg)	710 lb (322 kg)	697 lb (316 kg)/717 lb (325 kg)/ 738 lb (335 kg)
2-year/120-hour	2-year/120-hour	4-year/300-hour	4-year/300-hour	4-year/500-hour	4-year/500-hour





[JohnDeere.com](http://JohnDeere.com) | [JohnDeere.ca](http://JohnDeere.ca)

This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design, and price of the products described in this literature without notice. John Deere, the leaping deer symbol, and green and yellow trade dress are trademarks of Deere & Company.

DSTA67780 (16-12)



Nothing runs like a Deere™