

**Unverferth®** Bulk Seed Handling

*Seed Runner® self-loading seed tender*



***Innovation... Refined!***

***Lower profile, gentler conveyor design  
for easier, smoother self-filling  
and unloading***

*Models 3955XL, 3755XL, 3755, 2755XL, 2755*



## 3-Way Versatility!

*The Seed Runner bulk seed tender not only allows delivery of seed direct to the planter or drill, its patented design allows it to rotate 180° for filling itself. Or, you can also position the conveyor parallel to the tender for transferring seed from one container to another. That's 3-way versatility — loading, unloading and transferring — for three times the value!*



*Self-filling*



*Direct to planter or drill*

## Innovation... Refined!

Lower profile, gentler conveyor design for easier, smoother self-filling

The original patented, self-filling dual-compartment Unverferth Seed Runner® bulk seed tender set new standards for functional design innovation when first introduced in 2006. Unverferth design innovation continues with a new Seed Runner tender series tank design featuring a lower profile and gentler conveyor design for easier filling than ever!

Seed Runner seed tenders are ideal for the widest variety of bulk seed handling including corn, soybeans, cotton, peanuts and wheat.



## Conveyor

- Choice of 12" cupped and cleated belt inside an 8" tube or an 8" belt inside a 6" tube for gently moving seed
- Models with 8" conveyor unload up to 35 bushels per minute; 6" conveyors unload up to 16 bushels per minute
- Patent-pending rubber belt design with u-shaped rows of cupped cleats for gently carrying seed with up to 40% higher capacity
- 21' tubular steel conveyor raises up to 13'10" on XL models for easiest filling of central-fill planters
- 18' tubular steel conveyor raises to 12' on models 2755 and 3755
- Rounded discharge chute for easier self filling of tank with rubber lining for gentle seed handling
- Two standard downspouts included – 4' flexible for central fill planters and drills; 2-stage telescopic for 34' reach with XL models and 30' reach on others
- Up to 68" of hydraulically operated vertical height adjustment for optimum loading/unloading positioning depending on model
- Adjustable spring-lift assist for effortless positioning for self-filling
- Top-mounted, 6-cubic-inch hydraulic motor pulls the factory-aligned belt forward, keeping it tight for the most efficient and gentle seed movement
- Smooth start conveyor engagement brings the belt up to maximum speed quickly, yet gently for increased belt life and the adjustable flow control valve allows you to control the conveyor speed independently of the engine
- Conveyors powered by 390 cc (13 gross hp) Honda® gas engine with electric start and controls conveniently located on operating side of the unit
- Wired remote for easy conveyor on/off and raise/lower features a magnetic mount for easily storing on your Seed Runner tender
- Conveyor can be stored facing either the front or the rear of the tender
- Hopper features over-center locking for easier positioning and canvas cover for keeping intake free of debris
- Access panels with tool-free removal for easy belt tensioning
- Hinged cleanout doors for complete cleanout between varieties
- Brushes and patented side seals on conveyor inlet minimize damage by preventing seed from back feeding



*Cupped rows of offset cleats*



*Electric start Honda engine*



*Canvas hopper cover*



*Access panels with tool-free removal*



*Rounded discharge hood*



*Standard wired remote control*

**Models 3955XL, 3755XL, 3755, 2755XL, 2755**



## Tank

- 395 seed unit capacity for model 3955XL; 375 seed unit capacity for models 3755XL and 3755; 275 seed unit capacity for models 2755XL and 2755
- Larger tank opening for easier self-filling of seed
- Dual compartments for delivering multiple varieties
- Graphite-coated interior for fast, complete cleanout
- Each compartment features dual viewing windows with upper LED indicator light for easily determining fill level
- Dual, easy-opening 10" wide x 8" tall unloading doors for faster unloading with diverter panel to regulate seed flow
- Control panel with choke, ignition and throttle controls mounted on conveyor side permits convenient engine operation
- Standard, snug-fitting 18-ounce rollover tarp to protect load contents stays tightly locked, even at highway speed
- Trademarked ivory and tan speckle protective finishes with a powder-coated undercarriage and a two-part enamel topcoat on the tank with silicone sealed seams for long life
- Conveyor turntable features stainless steel roller plates for long life and durability with catches in 3/4" increments positioning the spout every 10"



*Large door openings*



*Spacious control console*



*Windows and lights for fill level*



*2-stage telescoping downspout*



*Standard 18" wide viewing ladder*



*Turntable features 3/4" increments*



## Undercarriage

- Undercarriage features rugged steel construction, all-wheel electric brakes, highway-rated tires, LED lighting, reflective striping and transport chains
- 12,000 lb.-capacity tandem axles with patent-pending rubber-cushioned suspension and oil bath hubs for model 3955XL
- Heavy-duty triple 7,000 lb.-capacity axles with rubber torsion suspension for the 3755XL and 3755
- Dual 7,000 lb.-capacity axles with axles with rubber-torsion suspension for models 2755XL and 2755
- Optional gooseneck hitch for greater hauling ease; features heavy-duty drop-leg jack for parking and adjustable hitch height for optimum load leveling; a 5th-wheel conversion is available for pulling with semi tractor
- Standard 2 5/16" ball hitch; optional 3" pintle
- All models also can be mounted to your own truck or undercarriage



*Models 3955XL, 3755XL, 3755, 2755XL, 2755*



## Accessories

- LED worklight package with internal tank and conveyor-spout lighting for convenient nighttime use
- Patent-pending 20" wide ladder design with gas-strut assist lowers and angles outward for easier viewing of load contents
- Tongue-mounted spare tire
- Three-stage downspout reaches up to 44' on XL models and 40' on all others
- Electric rollover tarp
- Hydraulically operated jack for bumper and gooseneck undercarriages for effortless raising and lowering



LED worklight package



20" gas-strut assist ladder

## Scales

- Optional scale packages can be factory- or field-installed and feature an optional downloader kit for transferring data to your personal computer and an optional printer for instant hard-copy verification
- Model 2410 scale features standard weigh operations and large LCD readout
- Model 2520 scale provides weigh information plus automatic conveyor shutoff for delivering precise quantities of seed time after time
  - Features built-in calculator for determining weight-per-box needed
  - USB drive port for saving seed delivery information and transferring to an office computer
  - Tracks variety and field information and even individual compartment unloading
- Scale monitor is enclosed in a weather-tight box for verifying the quantity of seed delivered or for using as a weigh cart at harvest
- Scale platform is also available for installing scales when using the Seed Runner tender on your own truck or undercarriage




Optional scale

## ***T&G Applicator for ideal lubrication***

- Patent-pending design for constant application of talc, graphite or a mixture of both for ideal lubrication and more consistent seed placement
- Automatically turns on and off in conjunction with conveyor
- 50 lbs. capacity and includes lower cleanout door
- Weather-tight hopper lid keeps contents dry; gas-strut lift assist for easy opening and filling
- Augers material into conveyor inlet and powered by Seed Runner hydraulics
- Auger system and internal agitation provide even flow and virtually eliminates the possibility of material bridging
- T&G Applicator system includes adjustable metering control from .5 lbs. to 9.4 lbs. per minute for delivering correct amount



*Compact design*

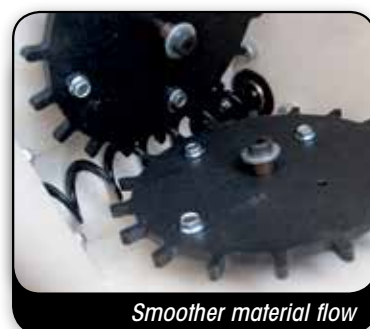

*Smoother material flow*

## ***Wireless remotes for easy one-person operation***

With the Unverferth Seed Runner tender's optional handheld wireless remote controls, you can increase your filling speed and efficiently control operations from anywhere up to 100' away.

- Heavy-duty weather- and impact-resistant plastic to withstand the harshest conditions
- Large, labeled switches for easy reading and operation, even with work gloves
- Magnetic attachment provides added storage convenience



*7-function handheld wireless remote*

### **Your choice of three wireless remote control packages**

- **3-function** — Conveyor on/off; conveyor raise/lower; open/close doors. Doors feature shut-off valve to insure correct compartment is unloaded
- **6-function** — Adds conveyor swing, engine start/stop with emergency "off" switch, engine throttle control and an LCD scale display
- **7-function** — Adds conveyor rotation into self-loading and loading positions and is available for models with 8" conveyors



*Hydraulic door-opening controls*

## Specifications

### Unverferth Seed Runner™ Seed Tender

Model	3955XL	3755XL	3755	2755XL	2755
Tire Size	235/75x17.5	235/85x16	235/85x16	235/85x16	235/85x16
Overall Length with Bumper Hitch	27'10"	27'10"	24'8"	26'11"	23'8"
Overall Length with Gooseneck Hitch	27'10"	27'10"	25'9"	26'11"	24'8"
Overall Width Transport	8'6"	8'6"	8'6"	8'6"	8'6"
Overall Height Transport	11'3"	10'8"	10'8"	10'3"	10'3"
Overall Load Height	10'6"	10'	10'	9'6"	9'6"
Box Length	14'	14'	14'	12'	12'
Box Width	8'6"	8'6"	8'6"	8'	8'
Box Height	9'1"	8'11"	8'11"	8'5"	8'5"
Box Load Height	8'4"	8'2"	8'2"	7'8"	7'8"
Box Base Length	9'5"	9'5"	9'5"	9'5"	9'5"
Box Base Width	5'	5'	5'	5'	5'
Undercarriage Length	22'3"	20'9"	20'9"	20'9"	18'2"
Overall Length Past the Hitch	24'3"	22'6"	22'6"	22'6"	19'5"
Undercarriage Deck Height	2'3"	1'10"	1'10"	1'10"	1'10"
Undercarriage Under Frame Clearance	1'	1'2"	1'2"	1'2"	1'2"
Conveyor Height in Transport Position	8'2"	7'10"	7'10"	7'6"	7'6"
Conveyor Maximum Unload Height	13'10"	13'6"	12'	13'6"	12'
Conveyor Reach at Maximum Unload Height	14'2"	14'2"	11'2"	14'2"	11'2"
Conveyor Minimum Unload Height	8'2"	7'10"	7'	7'10"	7'
Conveyor Reach at Minimum Unload Height	16'6"	16'6"	13'5"	13'6"	13'5"
Approximate Empty Weight	7,150 lbs.	6,820 lbs.	6,780 lbs.	6,040 lbs.	6,000 lbs.
Loaded Tongue Weight	1,000 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.
Hitch Type Standard/Optional	2½" ball/3" pintle	2½" ball/3" pintle	2½" ball/3" pintle	2½" ball/3" pintle	2½" ball/3" pintle
Lighting Connector	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat

U.S. patents #7,690,499; #8,221,047; 8,967,940. Additional U.S. and foreign patents applied for.

**See your nearest Unverferth dealer today or [umequip.com](http://umequip.com) for complete details on the entire line of Unverferth seed tenders.**

Due to continuing improvements in the design and manufacture of all Unverferth products, all specifications contained herein are subject to change without notice.

**Unverferth**  
Manufacturing Company, Inc.

P.O. Box 357 • Kalida, Ohio 45853  
(419) 532-3121  
[unverferth.com](http://unverferth.com)

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

©2016 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH  
Honda is a registered trademark of Honda Motor Company, Japan

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon, Ontario and Saskatchewan, Canada



USR61610605M7