



***DELIVER YOUR INVESTMENT
QUICKLY AND SAFELY***

SEED RUNNER®
Self-Filling Seed Tender



SEED TENDERS

55-Series Models
umequip.com



Unverferth® **BULK SEED HANDLING**

3-WAY VERSATILITY!

The Seed Runner® bulk seed tender not only allows delivery of seed directly to the planter or drill, but its patented design also allows it to rotate 180° for filling itself. Or you can also position the conveyor parallel to the tender for transferring seed from one container to another. That's 3-way versatility — loading, unloading and transferring — for three times the value!



Self-filling



Direct to planter or drill

INNOVATION...REFINED!

The original patented, self-filling dual-compartment Unverferth Seed Runner bulk seed tender set new standards for functional design innovation when first introduced in 2006. Unverferth design innovation continues with the 55-Series Seed Runner tenders for the gentlest seed handling yet, including corn, soybeans, cotton, peanuts and wheat. And they're available in capacities from 500 seed units to 275 seed units to match your operational needs.



Low-profile, gentle conveyor design for easier, smoother self-filling

CONVEYER



Cupped rows of offset cleats



2-stage telescoping downspout



Canvas hopper cover



Standard wired remote control



Adjustable rounded discharge hood



Access panel with tool-free removal

- Patented 5-ply rubber belt design with cupped rows of offset cleats for gently carrying seed at up to 40% higher capacity
- Conveyor lengths of 24' on DXL models, 21' on XL models and 18' on other models
- Two standard downspouts included – 4' flexible for central-fill planters and drills; 2-stage telescopic for 37' reach on DXL models, 34' reach with XL models and 30' reach on others
- Rounded discharge chute with rubber lining for gentle seed handling
- Smooth start conveyor engagement brings the belt up to maximum speed quickly yet gently for increased belt life, and the electronic flow control allows you to control the conveyor speed independently of the engine
- Brushes and patented side seals on conveyor inlet minimize damage by preventing seed from back feeding
- Models with 10" conveyor quickly unload up to 45 bushels per minute; 8" conveyor quickly unload up to 35 bushels per minute and 6" conveyors unload up to 16 bushels per minute
- Up to 90" of hydraulically operated vertical height adjustment for optimum loading/unloading positioning, depending on model
- Adjustable conveyor spring-lift assist for effortless positioning into self-filling position
- Top-mounted, 6-cubic-inch hydraulic motor pulls the factory-aligned belt forward, keeping it tight for the most efficient and gentle seed movement
- Conveyors powered by 390 cc (13 gross hp) Honda® gas engine with electric start and controls conveniently located on operating side of the unit; model 4955DXL features 690 cc (22.1 gross hp) engine
- Quick disconnect battery cables preserve battery life in storage
- Wired remote for easy conveyor on/off and raise/lower features a magnetic mount for easily storing on your Seed Runner tender
- Conveyor can be stored facing either the front or the rear of the tender
- Hopper features over-center locking for easier positioning and canvas cover for keeping intake free of debris
- Conveyor access panel with tool-free removal for easily checking belt tension
- Hinged under hopper cleanout door for complete cleanout between varieties



TANK



Large door openings

Spacious control console

Windows and lights for fill level

- 500 seed unit capacity with model 4955DXL; 400 with model 3955DXL, 375 with models 3755XL and 3755; 275 units for models 2755XL and 2755
- Large tank opening for easier self-filling of seed
- Dual compartments for delivering multiple varieties
- Graphite-coated interior for fast, complete cleanout
- Each compartment features dual viewing windows with upper LED indicator light for easily determining fill level
- Dual, easy-opening 10" wide x 8" tall unloading doors for faster unloading with baffles to regulate seed flow
- Control panel with choke, ignition and throttle controls mounted on conveyor side permits convenient engine operation
- Standard, snug-fitting 18-ounce rollover tarp to protect load contents; stays tightly locked, even at highway speed
- Trademarked ivory and tan speckle protective finishes with a powder-coated undercarriage and a two-part enamel topcoat on the tank with silicone-sealed seams for long life
- Conveyor turntable features stainless steel roller plates for long life and durability with catches in 3/4" increments positioning the spout every 10"



Turntable features 3/4" increments



Durable, 18-oz. rollover tarp



Electric start Honda engine

UNDERCARRIAGE



Oil bath hubs on 4955DXL, 3955DXL and 3955 XL



Rubber-cushioned suspension

- Undercarriage features rugged steel construction, all-wheel electric brakes, highway-rated tires, LED lighting, reflective striping and transport chains
- Model 4955DXL features 16,000 lb. tandem axles with duals, oil-bath hubs and a patented rubber-cushioned suspension with shock absorbers
- Models 3955DXL and 3955XL feature 12,000 lb. capacity tandem axles with single tires, oil-bath hubs and patented rubber-cushioned suspension and shock absorbers
- Models 3755XL and 3755 offer triple 7,000 lb.-capacity axles with rubber-torsion suspension
- Models 2755XL and 2755 offer dual 7,000 lb.-capacity axles with rubber-torsion suspension
- Standard 2 5/16" ball hitch; optional 3" pintle for bumper-style hitch
- Gooseneck hitch for greater hauling ease; features heavy-duty drop-leg jack for parking and adjustable hitch height for optimum load leveling. A 5th-wheel conversion for pulling with semi tractor and rubber-cushioned hitch receiver are also available
- All models also can be mounted to your own truck or undercarriage





ACCESSORIES



LED worklight package



20" gas-strut lift-assist ladder



Aluminum wheels

- LED worklight package with internal tank and conveyor-spout lighting for convenient nighttime use
- 20" wide ladder design with gas-strut lift-assist lowers and angles outward for easier viewing of load contents
- Three-stage downspout reaches up to 47' on DXL models, 44' on XL models and 40' on all others
- Electric rollover tarp
- Hydraulically operated jack for bumper and gooseneck undercarriages for effortlessly raising and lowering
- Aluminum wheels for a distinctive look
- Larger 285/70 x 19.5 tires for models 3955DXL and 3955XL
- Tongue-mounted spare tire

SCALES

- Optional scale packages can be factory- or field-installed and feature an optional downloader kit for transferring data to your personal computer and an optional printer for instant hard-copy verification
- Model 2410 scale features standard weigh operations and large LCD readout
- Model 2520 scale provides weigh information plus automatic conveyor shutoff for delivering precise quantities of seed time after time
 - Features built-in calculator for determining weight-per-box needed
 - USB drive port for saving seed delivery information and transferring to an office computer
 - Tracks field information and even individual compartment unloading
- Scale monitor is enclosed in a weather-tight box for verifying the quantity of seed delivered or for using as a weigh cart at harvest
- Scale platform is also available for installing scales when using the Seed Runner tender on your own truck or undercarriage



Optional Scale

ACCESSORIES

T&G APPLICATOR FOR IDEAL LUBRICATION

- Patented design for constant application of talc, graphite or a mixture of both for ideal lubrication and more consistent seed placement
- Automatically turns on and off in conjunction with conveyor
- 50 lb. capacity and a lower cleanout port
- Weather-tight hopper lid keeps contents dry; gas-strut lift assist for easy opening and filling
- Auger system and internal agitation provide even flow and virtually eliminates the possibility of material bridging
- Features adjustable metering control from .5 lbs. to 9.4 lbs. per minute for delivering correct amount
- Optional kit to allow easy application of synthetic fluency agents

WIRELESS REMOTE FOR EASY ONE-PERSON OPERATION

With the Unverferth Seed Runner tender's optional handheld wireless remote control, you can increase your filling speed and efficiently control operations up to 100' away.

- Heavy-duty weather- and impact-resistant plastic to withstand the harshest conditions
- Large, labeled switches for easy reading and operation, even with work gloves
- Magnetic attachment provides added storage convenience
- Manual override switch controls operation in the event the remote is unavailable

Your choice of three wireless remote control packages

- **3-function** — Conveyor on/off; conveyor raise/lower; open/close doors. Doors feature shut-off valve to ensure correct compartment is unloaded; standard on 4955DXL
- **6-function** — Adds conveyor swing, engine start/stop with emergency "off" switch, engine throttle control and an LCD scale display
- **7-function** — Adds conveyor rotation into self-filling and loading positions; is available for models with 8" and 10" conveyors, and also includes LCD scale display



Compact design




Smoother material flow



7-function handheld wireless remote





Manual override switch controls

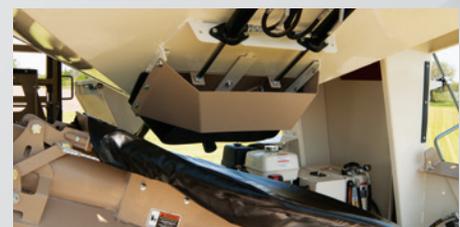

Hydraulic door-opening controls

Unverferth Seed Runner® Seed Tender Specifications

Description		4955DXL	3955DXL	3955XL	3755XL	3755	2755XL	2755
A	Overall Length							
	Bumper Hitch	—	31'	27'10"	27'10"	24'8"	26'11"	23'8"
	Gooseneck Hitch	32'	31'	27'10"	27'10"	25'9"	26'11"	24'8"
B	Overall Width Transport	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
C	Overall Height Transport	11'11"	11'3"	11'3"	10'8"	10'8"	10'3"	10'3"
D	Overall Load Height	11'	10'6"	10'6"	10'	10'	9'6"	9'6"
E	Box Length	16'8"	14'	14'	14'	14'	12'	12'
F	Box Width	8'6"	8'6"	8'6"	8'6"	8'6"	8'	8'
G	Box Height	9'6"	9'1"	9'1"	8'11"	8'11"	8'5"	8'5"
H	Box Load Height	8'8"	8'4"	8'4"	8'2"	8'2"	7'8"	7'8"
I	Box Base Length	12'2"	9'5"	9'5"	9'5"	9'5"	9'5"	9'5"
J	Box Base Width	6'11"	5'	5'	5'	5'	5'	5'
K	Undercarriage Length	27'5"	22'3"	22'3"	20'9"	20'9"	20'9"	20'9"
L	Overall Length To the Hitch	28'8"	24'3"	24'3"	22'6"	22'6"	22'6"	22'6"
M	Undercarriage Deck Height	2'4"	2'3"	2'3"	1'10"	1'10"	1'10"	1'10"
N	Undercarriage Under Frame Clearance	1'1"	1'	1'	1'2"	1'2"	1'2"	1'2"
O	Conveyor Height in Transport Position	8'2"	8'9"	7'10"	7'10"	7'6"	7'10"	7'6"
P	Conveyor Max Unload Height	13'11"	15'7"	13'6"	13'6"	12'	13'6"	12'
Q	Conveyor Reach at Max. Unload Height	17'4"	16'10"	14'2"	14'2"	11'2"	14'2"	11'2"
R	Conveyor Min Unload Height	6'5"	8'8"	7'10"	7'10"	7'	7'10"	7'
S	Conveyor Reach at Minimum Unload Height	19'8"	19'8"	16'6"	16'6"	13'5"	16'6"	13'5"
	Approximate Empty Weight	11,000 lbs.	7,300 lbs.	7,150 lbs.	6,820 lbs.	6,750 lbs.	6,040 lbs.	6,000 lbs.
	Loaded Tongue Weight	6,700 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.	1,000 lbs.
	Lighting Connector	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat	7-Pin Flat
	Overall Height — Less Undercarriage	10'2"	9'1"	9'1"	8'11"	8'11"	8'5"	8'5"

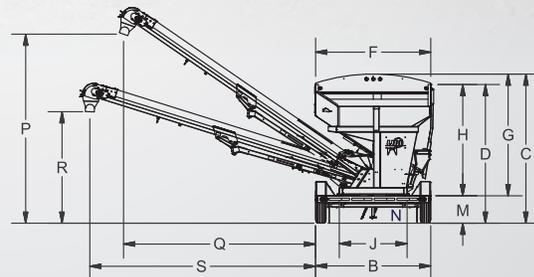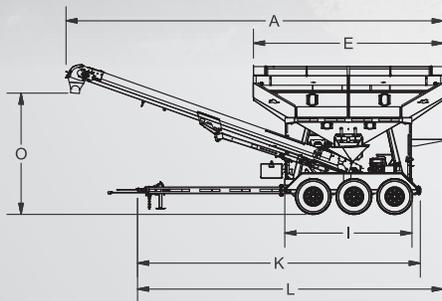

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit unverferth.com/patents.

Unverferth
Manufacturing Company, Inc.

© 2019 Unverferth Manufacturing Co., Inc.
Printed in U.S.A.

P.O. Box 357 | Kalida, OH 45853 | unverferth.com | 419.532.3121

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH
Honda is a registered trademark of Honda Motor Company, Japan

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon, Texas,
Ontario and Saskatchewan, Canada



UMSR91514005M7